

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : C08G 18/67, 18/50, C09D 175/16, C03C 25/02</p>	<p>A1</p>	<p>(11) International Publication Number: WO 96/23828 (43) International Publication Date: 8 August 1996 (08.08.96)</p>
<p>(21) International Application Number: PCT/NL95/00041 (22) International Filing Date: 30 January 1995 (30.01.95) (71) Applicant: DSM N.V. [NL/NL]; Het Overloon 1, NL-6411 TE Heerlen (NL). (72) Inventors: SZUM, David, M.; Unit 1A, 740 East Grant Highway, Marengo, IL 60152 (US). MURRAY, Kevin, P.; 1759 Glen Lake Road, Hoffman Estates, IL 60195 (US). ZIMMERMAN, John, M.; 4450 Shorewood Drive, Hoffman Estates, IL 60195 (US) (74) Agent: KLEIBORN, Paul, Erik; Octrooibureau DSM, P.O. Box 9, NL-6160 MA Geleen (NL).</p>		<p>(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i></p>
<p>(54) Title: RADIATION CURABLE COMPOSITION COMPRISING FLUORINATED URETHANE OLIGOMER (57) Abstract A radiation-curable composition is disclosed. A fluorinated oligomer is combined with a diluent monomer and a photoinitiator to form the radiation-curable coating composition. The fluorinated oligomer is substantially free of isocyanate groups. The radiation-curable compositions provide a suitable coating for substrates, are resistant to penetration by water and liquid hydrocarbons, retain their physical properties over a wide temperature range and exhibit immeasurably low surface friction properties.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France			UZ	Uzbekistan

RADIATION CURABLE COMPOSITION
COMPRISING FLUORINATED URETHANE OLIGOMER

5

Technical Field

This invention is directed to radiation curable oligomer compositions that are useful as coatings for various substrates.

Background of the Invention

There are many applications that require radiation curable coating composition that are optically clear and resist penetration or absorption by water or chemicals. For example, barrier coatings and coatings for optical glass fibers should have these properties. Furthermore, barrier coatings and coatings for optical fibers should retain these properties over a broad temperature range.

Fluorine-containing polymers are very resistant to penetration by water and chemicals and therefore are well suited for use as barrier coatings. A patent application disclosing fluoropolymer claddings for optical fibers, designated AD-D014 140 to Klinger et al., was published by the Office of the Chief of Naval Research, U.S.A., on May 12, 1989. The cis-trans fluoropolyol polyacrylate coating is referred to therein as an infinite network fluoropolymer. As a result, the fluoropolymers disclosed in the Klinger et al. application have a very high molecular weight. These very high molecular weight fluoropolyol polyacrylate polymers, when used in coating compositions, are not easily applied to substrates.

U.S. Patent No. 4,968,116 discloses optical fiber coating compositions that comprise a fluorinated mono acrylate, a polyfunctional cross-linking acrylate and a photoinitiator.

Summary of the Invention

The present invention is directed to radiation curable oligomer compositions that are curable by free radical or a cationic mechanism.

5 The compositions of the present invention comprise a fluorinated urethane oligomer; at least one diluent monomer; and a photoinitiator. The fluorinated urethane oligomer is the reaction product of a fluorinated polyol, a polyisocyanate and a isocyanate reactive monomer
10 containing ethylenic unsaturation. The isocyanate reactive monomer is preferably a (meth)acrylate, vinyl ether, maleate or fumarate. The diluent monomer is preferably a fluorinated monomer.
The fluorinated urethane oligomer has a molecular weight
15 in the range of about 700 to about 10000, preferably about 1000 to about 5000.

The present invention also relates to methods of applying the above compositions to substrates and to substrates coated with the above compositions.

20

Brief Description of The Drawings

FIGURE 1 illustrates the water-insensitivity of the coating composition of the present invention as indicated by the graph of weight change in water versus
25 time;

FIGURE 2 illustrates the hydrocarbon insensitivity of the coating composition of the present invention as indicated by the graph of weight change in hydrocarbon versus time; and

30 FIGURE 3 illustrates the effect of temperature on the modulus of the coating composition of the present invention.

Detailed Description of the Present Invention

35 The fluorinated oligomers useful in the compositions of the present invention are the reaction

product of a fluorinated polyol, a polyisocyanate and an isocyanate reactive monomer containing ethylenic unsaturation. The resulting oligomers have molecular weights that are generally in the range of about 700 to about 10000, preferably about 1000 to about 5000. They are also substantially free of isocyanate functionality. These fluorinated oligomers are combined with a diluent and a photoinitiator to form the radiation curable compositions of the present invention.

10 The fluorinated polyols which are reacted with a polyisocyanate and endcapped with a functional compound containing ethylenic unsaturation to make the compositions of the present invention preferably include fluorinated polymethylene oxide, polyethylene oxide, polypropylene and
15 polytetramethylene oxide or copolymers thereof endcapped with ethylene oxide. The preferred fluorinated polyols are the Fomblin Z-Dol TX series of products, marketed by Ausimont USA Inc. These polyols are fluorinated poly(ethylene oxide-methylene oxide) copolymers endcapped
20 with ethylene oxide.

Other suitable fluorinated polyols include polyols such as L-12075 marketed by 3M Corporation and the MPD series of polyols marketed by DuPont.

Any of a wide variety of organic
25 polyisocyanates, alone or in admixture, can be reacted with the fluorinated polyols and ethylenically unsaturated isocyanate reactive compounds to form the endcapped fluorinated oligomers of the present invention. Diisocyanates are the preferred polyisocyanates.
30 Representative diisocyanates include isophorone diisocyanate (IPDI), toluene diisocyanate (TDI), diphenylmethane diisocyanate, hexamethylene diisocyanate, cyclohexylene diisocyanate, methylene dicyclohexane diisocyanate, 2,2,4-trimethyl hexamethylene
35 diisocyanate, m-phenylene diisocyanate, 4-chloro-1,3-phenylene diisocyanate, 4,4'-biphenylene diisocyanate, 1,5-

naphthylene diisocyanate, 1,4-tetramethylene diisocyanate
1,6-hexamethylene diisocyanate, 1,10-decamethylene
diisocyanate, 1,4-cyclohexylene diisocyanate, and
polyalkyloxide and polyester glycol diisocyanates such as
5 polytetramethylene ether glycol terminated with TDI and
polyethylene adipate terminated with TDI, respectively.
The preferred isocyanate is IPDI.

The fluorinated polyol and polyisocyanate are
combined in a weight ratio of about 1.5:1 to about 7.5:1
10 fluorinated polyol to polyisocyanate. The fluorinated
polyol and polyisocyanate are reacted in the presence of a
catalyst to facilitate the reaction. Catalysts for the
urethane reaction, such as dibutyltin dilaurate and the
like, are suitable for this purpose.

15 The isocyanate-terminated prepolymers are
endcapped by reaction with an isocyanate reactive
functional monomer containing an ethylenically unsaturated
functional group. The ethylenically unsaturated functional
groups are preferably acrylates, vinyl ethers, maleates,
20 fumarates or other similar compounds.

Suitable monomers that are useful to endcap the
isocyanate terminated prepolymers with the desired
(meth)acrylate functional groups include hydroxy
functional acrylates such as 2-hydroxy ethyl acrylate, 2-
25 hydroxy propyl acrylate and the like.

Suitable monomers which are useful to endcap the
isocyanate terminated prepolymers with the desired vinyl
ether functional groups include 4-hydroxybutyl vinyl
ether, triethylene glycol monovinyl ether and 1,4-
30 cyclohexane dimethylol monovinyl ether. Suitable monomers
which are useful to endcap the prepolymers with the
desired maleate functional group, include maleic acid and
hydroxy functional maleates.

Preferably, there is a sufficient amount of
35 isocyanate reactive functionality in the monomer
containing acrylate, maleate, vinyl ether or other

ethylenically unsaturated groups to react with any residual isocyanate functionality remaining in the prepolymer and endcap the prepolymer with the desired functional group. The term "endcap" means that a functional group caps each of the two ends of the prepolymer.

The isocyanate reactive ethylenically unsaturated monomer is reacted with the reaction product of the fluorinated polyol and the isocyanate. The reaction preferably takes place in the presence of an antioxidant such as butylated hydroxytoluene (BHT) and the like.

In the reaction between hydroxy and isocyanate groups, it is preferred to employ a stoichiometric balance between hydroxy and isocyanate functionality and to maintain the reactants at an elevated reaction temperature of at least about 40°C until the isocyanate functionality is substantially consumed. This also indicates the hydroxy functionality is similarly consumed. The mole ratio of the polyether/isocyanate reaction product to the ethylenically unsaturated monomer is 0.5:1.

The resulting alkoxyated fluorinated oligomer preferably comprises about 30 weight percent to about 90 weight percent of the coating composition of the present invention and more preferably about 30 to about 80 weight percent of the coating composition.

The fluorinated oligomers used in the composition of the present invention have a viscosity of about 10000 centipoise to about 10000000 centipoise. The fluorinated oligomers are preferably combined with a diluent monomer to reduce their viscosity and make them more readily applied as coatings. The diluent monomer acts as a solvent to reduce the viscosity of the fluorinated oligomer by forming a solution. The diluent monomers are preferably fluorinated to impart the optimum properties to the coating composition.

Representative diluent monomers include the


following fluorinated acrylate monomers:

2,2,3,3-tetrafluoropropyl acrylate which can be commercially obtained from the Polysciences Corporation in Warrington, Pennsylvania, U.S.A., and from the PCR Corporation in Gainesville, Florida, U.S.A. designated as item number 07578 in the Polysciences Catalog and item number 12432-1 in the PCR Catalog;

1H,1H,5H-octafluoropentyl acrylate which can be commercially obtained from the Polysciences Corporation in Warrington, Pennsylvania, U.S.A., designated as item number 21044 in the Polysciences Catalog;

1H,1H,2H,2H-heptadecafluorodecyl acrylate which can be commercially obtained from the Polysciences Corporation in Warrington, Pennsylvania, U.S.A. designated as item number 19227 in the Polysciences Catalog;

a cyclic composition designated by the formula:



which can be commercially obtained from the Minnesota Mining and Manufacturing Company (3M) in St. Paul, Minnesota, U.S.A., designated as item number L-11619 in the 3M Catalog;

a composition designated by the formula:

$[\text{CH}_2=\text{CH}-\text{C}(=\text{O})\text{CH}_2\text{CF}(\text{CF}_3)-\text{O}[\text{CF}(\text{CF}_3)\text{CF}_2\text{O}]_2\text{C}_2\text{F}_4]_2$ which can be commercially obtained from the 3M Corporation, designated as item number L-12043 in the 3M Catalog;

a composition designated by the formula:

$\text{CH}_2=\text{CH}-\text{C}(=\text{O})\text{CH}_2(\text{C}_2\text{F}_4\text{O})_m-(\text{CF}_2\text{O})_n\text{CH}_2\text{OC}(=\text{O})\text{CH}=\text{CH}_2$ which can be commercially obtained from the 3M Corporation, designated as item number L-9367 in the 3M catalog; and

a composition designated by the formula:


$\text{C}_6\text{F}_{11}\text{SO}_2\text{N}(\text{C}_4\text{H}_9)\text{CH}_2\text{CH}_2\text{OC}(=\text{O})\text{CH}=\text{CH}_2$ which can be commercially obtained from the 3M Corporation, designated as FX-189 in

the 3M Catalog.

The diluents preferably comprise about 10 to about 70 weight percent, more preferably about 14 to about 69.9 weight percent based on the total weight of the coating composition of the present invention.

The compositions according to the invention are prepared by mixing the fluorinated urethane oligomer, the diluent monomer and optionally the photoinitiator and other components. Preferably the fluorinated urethane is dissolved in the diluent monomer and a photoinitiator to form a liquid coating composition. When the compositions of the present invention are cured by exposing them to actinic energy of appropriate wavelength, such as ultraviolet light, a photoinitiator is admixed with the fluorinated oligomer solution. Preferred photoinitiators include hydroxy- or alkoxy-functional acetophenone derivatives, preferably hydroxyalkyl phenyl ketones, or benzoyl diaryl phosphine oxides. Oligomers having the two different types of ethylenic unsaturation, i.e., the vinyl ether group and another ethylenically unsaturated group, copolymerize rapidly in the presence of these photoinitiators to provide a rapid photocure and also interact rapidly upon exposure to other types of energy when no polymerization initiator is present.

The acetophenone derivatives that may be used have the Formula I:




in which R^m is an optional hydrocarbon substituent containing from 1 to 10 carbon atoms and which may be alkyl or aryl, e.g., methyl ethyl, butyl, octyl or phenyl, X is selected from the group consisting of hydroxy, C_1 to C_4 alkoxy, C_1 to C_8 alkyl, cycloalkyl, halogen, and aryl, e.g. phenyl, or 2 Xs together are cycloalkyl.

Many compounds have the required structure. The

alkoxy groups are preferably methoxy and ethoxy, the cycloalkyl group is preferably cyclohexyl or phenoxy, the alkyl group is preferably cyclohexyl, and the halogen is preferably chlorine. One commercially available compound is the Ciba-Geigy product Irgacure 651 which has the Formula II:


(II)



10

Irgacure 184, also from Ciba-Geigy, is another useful acetophenone derivative, and it has the Formula III:

(III)




15

Still another commercially available useful acetophenone derivative is diethoxy acetophenone, available from Upjohn Chemicals, North Haven, CT, U.S.A. which has the Formula IV:

20


(IV)



The hydroxyalkyl phenyl ketones which are preferred herein have the Formula V:

25


(V)



in which R^o is an alkylene group containing from 2-8 carbon atoms and Rⁿ is an optional hydrocarbon substituent containing from 1 to 10 carbon atoms and which may be alkyl or aryl, e.g., methyl, ethyl, butyl, octyl or phenyl.

Particularly preferred compounds have the Formula VI:


(VI)



in which each R^{P} is independently an alkyl group containing from 1 to 4 carbon atoms. In the commercial product Darocur 1173 (available from E-M Company, Hawthorne, N.Y., U.S.A.), each R^{P} is methyl. This provides a compound which can be described as 2-hydroxy-2-methyl-1-phenyl propane 1 one.

The benzoyl diaryl phosphine oxide photoinitiators which may be used herein have the Formula VII:

(VII)

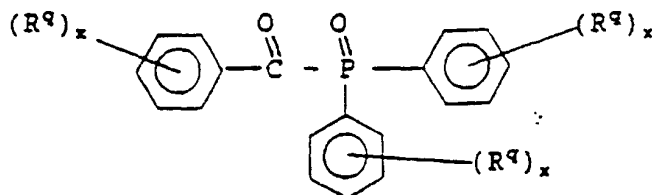

15

In Formula VII, R^{Q} is an optional hydrocarbon substituent containing from 1 to 10 carbon atoms and may be alkyl or aryl as previously noted, and each x is independently an integer from 1 to 3. In preferred practice, a 2,4,6-trimethyl benzoyl compound is used, and the two aromatic groups connected to the phosphorus atom are phenyl groups. This provides the compound 2,4,6-trimethyl benzoyl diphenyl phosphine oxide which is available from BASF under the trade designation Lucerin TPO.

When utilized, the photoinitiator is present in an amount in the range of about 0.01 to about 10.0, preferably about 0.1 to about 6.0, weight percent based on the total weight of the composition.

Suitable sources of actinic energy include lasers and other conventional light sources having an effective energy output, e.g., mercury lamps.

The wavelength of the actinic energy extends from the ultraviolet range, through the visible light

range and into the infrared range. Preferred wavelengths are about 200 to about 2,000, more preferably about 250 to about 1,000, nanometers (nm).

The amount of actinic energy utilized to
5 solidify a 3 mil thick film is about 0.05 to about 5.0, preferably about 0.05 to about 1, Joules per square centimeter (J/cm^2).


The invention thus further comprises a process for coating a substrate comprising: dissolving a
10 fluorinated urethane oligomer in a diluent monomer and a photoinitiator to form a liquid coating composition; applying the liquid coating composition to a substrate; and exposing the liquid coating composition to a sufficient amount of actinic energy to cure the coating
15 composition on the substrate. The free-radical curable compositions of the present invention can be utilized in a variety of applications. For example, they can be utilized as coatings for many substrates such as textile fibers, polycarbonate and polyacrylic sheets, yarns, filaments and
20 threads, fabrics, as primary and secondary optic glass fiber coatings, and as cladding for plastic optical fibers. They can also be utilized in a metallization process wherein a non-metallic substrate is provided with a metal finish, to produce objects utilizing an optical
25 fabrication process as described in U.S. Patent No. 4,575,330 to Hull, in composite materials, as flame retardants, residual lubricants and other applications.

The following Examples are present by way of representation, and not limitation, of the present
30 invention.

EXAMPLE 1: Preparation of Fluorinated Oligomer with a Number Average Molecular Weight of 2000

Fomblin Z-Dol TX 3500 (Z-Dol TX 3500), [151.74 g
35 (0.0914 eq.)] isophorone diisocyanate (IPDI) [33.96 g (0.3032 eq.)] and dibutyltin dilaurate (0.2g) were charged

into a four-necked round bottom flask fitted with a stirrer, dry air sparge, reflux condenser, thermometer, and a heated mantle on a thermostat-controlled automatic jack. The combined ingredients were maintained at 70°C for 4 hours. The amount of free isocyanate remaining in the reaction product was measured to be 4.78 percent by a procedure in which a sample of the oligomer solution is reacted with a known amount of dibutylamine in excess. The amount of remaining dibutylamine is measured by titration with HCl, and the percent NCO is calculated. 2-hydroxyethyl acrylate (HAE) [24.46 g (0.2107 eq.)] and butylated hydroxytoluene (0.18 g) were added to the reaction product. After one hour, the percent free isocyanate was measured again and found to be negligible (< 0.1). The structure of the resultant fluorinated oligomer is schematically represented by:




in which the amount of IPDI-Z Dol TX 3500 is calculated by dividing the Eqs. of polyol by the Eqs. of hydroxyethyl acrylate.

EXAMPLE 2: Preparation of a Fluorinated Oligomer with a Number Average Molecular Weight of 1300


Fomblin Z-Dol TX 2000, [186.9 g (0.2212 eq.)] isophorone diisocyanate [83.70 g (0.749 eq.)] and dibutyltin dilaurate (0.2 g) were charged into a fournecked round bottom flask fitted with a stirrer, dry air sparge, reflux condenser, thermometer, and a heating mangle on a thermostat-controlled automatic jack. The contents were maintained at 70°C for four hours. The amount of free isocyanate remaining in the reaction product was measured and found to be 7.72 weight percent. The reaction product was cooled to 60°C. BHT 0.25 g and 2-hydroxyethyl acrylate [61.3 g (0.5279 eq.)] were added to the reaction product. After one hour, the percent free isocyanate was measured again and found to be negligible

(< 0.1). The structure of the resultant fluorinated oligomer is represented schematically by:



5 EXAMPLE 3: Preparation of a Fluorinated Oligomer with
a Number Average Molecular Weight of 1000

Fomblin Z-Dol TX 1000 [196.13 (0.3197 eq.)]
isophorone diisocyanate [125.20 g (1.1199 eq.)] and
dibutyltin dilaurate (0.26 g) were charged into a
10 fournecked round bottom flask fitted with a stirrer, dry
air sparge, reflux condenser, thermometer, and a heating
mantle on a thermostat-controlled automatic jack. The
combined ingredients were maintained at 80°C for three
hours. The amount of free isocyanate in the reaction
15 product was measured and found to be 11.02 percent. BHT
(0.29 g) and 2-hydroxyethyl acrylate [97.8 g (0.8422 eq.)]
were added to the reaction product. After one hour, the
percent free isocyanate was negligible (< 0.1). The
structure of the resultant oligomer is represented
20 schematically by:



EXAMPLE 4: Coating Composition containing Fluorinated Oligomers

25 Coating compositions were prepared using the
fluorinated oligomers described in Examples 1 to 3. A
fluorinated oligomer was combined with a diluent monomer
and a photoinitiator in the amounts described in Table 1.
From 35 to 78 weight percent of the fluorinated oligomer
30 was combined with from 20 to about 63 weight percent of
the reactive diluent and about 2 weight percent of the
photoinitiator.

Five coating compositions were prepared, three using the fluorinated oligomer of Example 1, one using the fluorinated oligomer of Example 2 and one using the fluorinated oligomer of Example 3.

The fluorinated oligomer, diluent monomer and photoinitiator were combined using a mixer. Each composition was applied to a glass plate and subjected to a dosage of 1 J/cm² radiation. The physical properties of the coatings thus obtained were measured thereby demonstrating the effectiveness of the coatings. The results of the measurements so made are reported in Table 1 below.

TABLE 1

Properties of Cured Compositions
According to the Present Invention

5

10

15

20

25

30

Oligomer	Example 1	Example 1	Example 1	Example 2	Example 3	Example 4
(wt.%)	68%	78%	78%	62%	62%	35%
Diluent	PolySci	PolySci	3M	3M	3M	3M
monomer	21044	07578	L-11619	L-11619	L-11619	L-11619
(wt.%)	30%	20%	20%	36%	36%	63%
Photoin- itiator	Irgacure 184	Darocur 1173	Irgacure 184	Lucerin TPO	Lucerin TPO	Lucerin TPO
(wt.%)	2%	2%	2%	2%	2%	2%
Viscosity (cP)				6300	4200	215
Tensile strength (MPa)	8	14	11	21	33	
Elongation (%)	69	58	46	36	13	
Modulus (Mpa)	34	204	183	548	862	
Liquid RI				1.3925	1.4119	1.389
Film RI				1.41	1.431	
COF (to Stainless Steel)				0.18	0.06	
COF (Film to Film)				0.19	0.17	

The physical properties of the coatings reported in Table 1 were measured as discussed below.

35

Viscosity

The viscosity, expressed in centipoise (cp) was measured using a Brookfield Model RVTD viscometer operated in accordance with the instructions provided therewith.

5 The temperature of the sample tested was 25°C.

Tensile Properties

A film for determination of the tensile properties. i.e., tensile strength Megapascals (Mpa), percent elongation at break (%) and modulus at 2.5%
10 elongation (Mpa), of the coating was prepared by drawing down a 3 mil coating on glass plates using a Bird bar, commercially available from Pacific Scientific, Silver Springs, MD. An automatic draw down apparatus like a Gardner AG-3860 commercially available from Pacific
15 Scientific, Gardner/Neotec Instrument Division, Silver Springs MD, can be utilized. The coating was cured using a "D" lamp from Fusion Curing Systems, Rockville, MD. The "D" lamp emits radiation having a wavelength of about 200 to about 470 nanometers with the peak radiation being at
20 about 380 nanometers and the power output thereof is about 300 wats per linear inch. The coating was cured at a dose of about 1 J/cm² which provided complete cure. The film was then conditioned at 23 ± 2°C. and 50 ± 3% relative humidity for a minimum time period of 16 hours.

25 Six, 0.5 inch wide test specimens were cut from the film parallel to the direction of the draw down and removed from the glass plate. Triplicate measurements of the dimensions of each specimen were taken and the average utilized. The tensile properties of these specimens were
30 then determined using a Instron Model 4201 from Instron Corp., Canton, MA, U.S.A. operated in accordance with the instructions provided therewith.

COF (Coefficient of Friction)

35 The coefficient of friction properties of cured films are determined by the following procedure:

The cured coating, as a draw-down on a glass plate, is attached to a horizontal support table on the Instron testing instrument. The friction surface, with a dead weight load, is then drawn across the film at a specified rate, and the stress-strain recorded. The steady-state average stress value is taken from the curve and the coefficient of friction is calculated.

A Universal Testing Instrument, Instron Model 4201, or equivalent, equipped with an appropriate data system and applications software, load cell (ten pound capacity), support table with pulley, COF sled, weighing approximately 100 g, double sided transparent adhesive tape, 3M, 2.0 in width, or equivalent, blade handle, size # 4, Bard-Parker 1040 or equivalent and scalpel blades, size # 23, SGA Scientific Catalog # D-5451 or equivalent, are utilized.

To determine the film-to-film COF, the COF sled containing the coating square is placed coating side down onto the beginning of the test path with wire kept taught and permitted to travel four inches. This is repeated five times.

To determine the dynamic coefficient of friction, the system is the same except the COF sled is placed, balls down, on the cured film at the end of the selected path, with the wire taught.

Cured films for the material to be tested are prepared and cut to the size of the COF sled. The square of cured coating is attached to the smooth side of the COF sled with double-sided tape. The COF sled with and without the coating square attached, is weighed.

The instrument is set-up by installing the load cell and pneumatic action grips, installing the support table in the lower Instron fixture, setting the crosshead speed to 10.00 inches/minute, and stringing the COF sled wire along the support table and through the grooved pulley wheel. The line is attached in the upper pneumatic

grip, leaving a little slack.

The COF for each replicate is calculated by dividing the replicate value by the weight of the sled. For film-to-film COF the sled weight with the coating square is used and for dynamic COF the sled weight without the coating square is used.

EXAMPLE 5: Water Resistance of Compositions of the Present Invention

10 Coating compositions of the present invention were prepared as discussed in Example 4 above. The compositions were immersed in water and the weight of the coating compositions was monitored over several days to determine how much water was absorbed by the film over
15 time. As illustrate by FIGURE 1, the weight of the coating composition increased only by about 0.5 weight percent almost immediately upon immersion in water and remained constant for the next two weeks thereafter, indicating that the coating composition of the present invention does
20 not absorb a significant amount of water and therefore provides an excellent moisture barrier.

EXAMPLE 6: Hydrocarbon Resistance of Compositions of the Present Invention

25 Coating compositions of the present invention were prepared as discussed in Example 4. The compositions were then immersed in a C₁₄-C₁₆ alpha-olefin and the percent weight change of the coating compositions were monitored over time. As can be observed from FIGURE 2,
30 after an initial weight gain of about 0.65 weight percent over the first day of the trial, the weight of the compositions remained relatively constant throughout a fourteen day period. Thus, the coating composition of the present invention is relatively insensitive to
35 hydrocarbons and provides an effective barrier to hydrocarbon penetration.

EXAMPLE 7: Effect of Temperature on the Coatings of
the Present Invention

Coating compositions of the present invention were prepared as described in Example 4. The compositions
5 were analyzed to determine the effect of temperature on the modulus of the composition. In FIGURE 3, E' refers to storage (rubbery) Modulus, E'' refers to loss (viscous) Modulus and Tan Delta refers to E'/E'' . FIGURE 3 illustrates that from about -90°C to about 30°C , the
10 modulus remains relatively constant. Furthermore, FIGURE 3 illustrates that the composition does not become brittle until exposed to temperatures below -130°C . Thus the compositions remain flexible over a broad temperature range.

15 From the foregoing, it will be observed that numerous variations and modifications may be effected without departing from the true spirit and scope of the present invention. It will be understood that no limitations with respect to the specific compositions
20 illustrated herein is intended or should be inferred. The scope of the invention is intended to cover by the appended claims all such modifications that fall within the scope of the claims.

C L A I M S:

1. A radiation curable composition comprising a fluorinated urethane oligomer and at least one diluent monomer.
2. The composition according to claim 1, wherein the fluorinated urethane monomer is the reaction product of a fluorinated polyol, a polyisocyanate and an isocyanate reactive monomer containing an ethylenically unsaturated functional group, the isocyanate reactive monomer being present in an amount sufficient for the oligomer to be substantially free of isocyanate groups and endcapped with the ethylenically unsaturated functional group.
3. The composition according to claim 2, wherein the ethylenically unsaturated functional group is selected from the groups consisting of (meth)acrylate, vinyl ether, maleate and fumarate functional groups.
4. The composition according to any one of claims 1-3, wherein the fluorinated urethane oligomer has a molecular weight of 700 to 10000.
5. The composition according to claim 4, wherein the fluorinated urethane oligomer has a molecular weight of 1000 to 5000.
6. The composition according to any one of claims 1-5, wherein the diluent monomer is a fluorinated monomer.
7. The composition according to any of claims 1-6, comprising:
 - a) 30-90 weight % fluorinated urethane oligomer
 - b) 10-70 weight % diluent
 - c) 0 -10 weight % photoinitiator.
8. The composition according to claim 7, comprising:
 - a) 30-80 weight % fluorinated urethane oligomer
 - b) 14-69.9 weight % diluent
 - c) 0.1-6 weight % photoinitiator.

9. A process for coating a substrate comprising:
dissolving a fluorinated urethane oligomer in a
diluent monomer and a photoinitiator to form a liquid
coating composition; applying the liquid coating
composition to a substrate; and exposing the liquid
coating composition to a sufficient amount of actinic
energy to cure the coating composition on the
substrate.
10. The process of claim 9, wherein the liquid coating
composition is a composition according to any one of
claims 1-8.
11. The process of claim 9 or 10, wherein the substrate is
a glass.
12. The process of claim 9 or 10, wherein the substrate is
a thermoplastic.
13. The process of claim 9 or 10, wherein the substrate is
a polycarbonate polyacrylic sheet.
14. The process of claim 11 wherein the substrate is an
optical fiber.
15. An article coated with a coating composition according
any one of claims 1-8.

FIG. 2

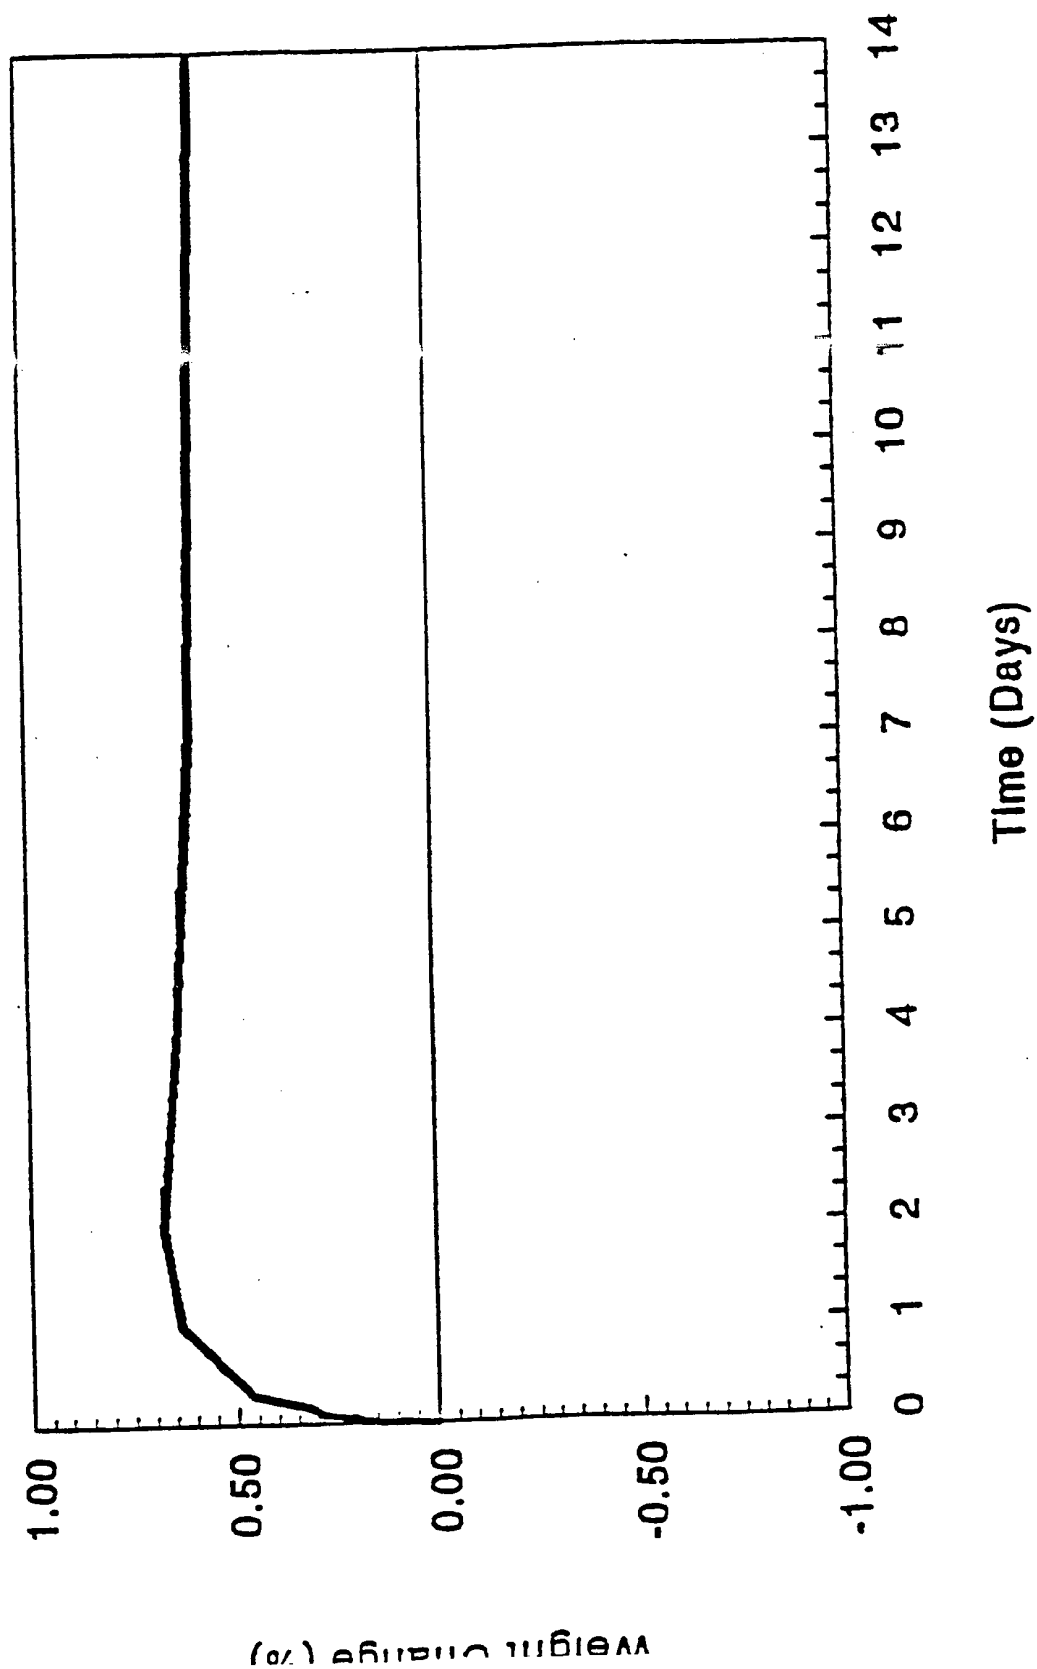


FIG. 1


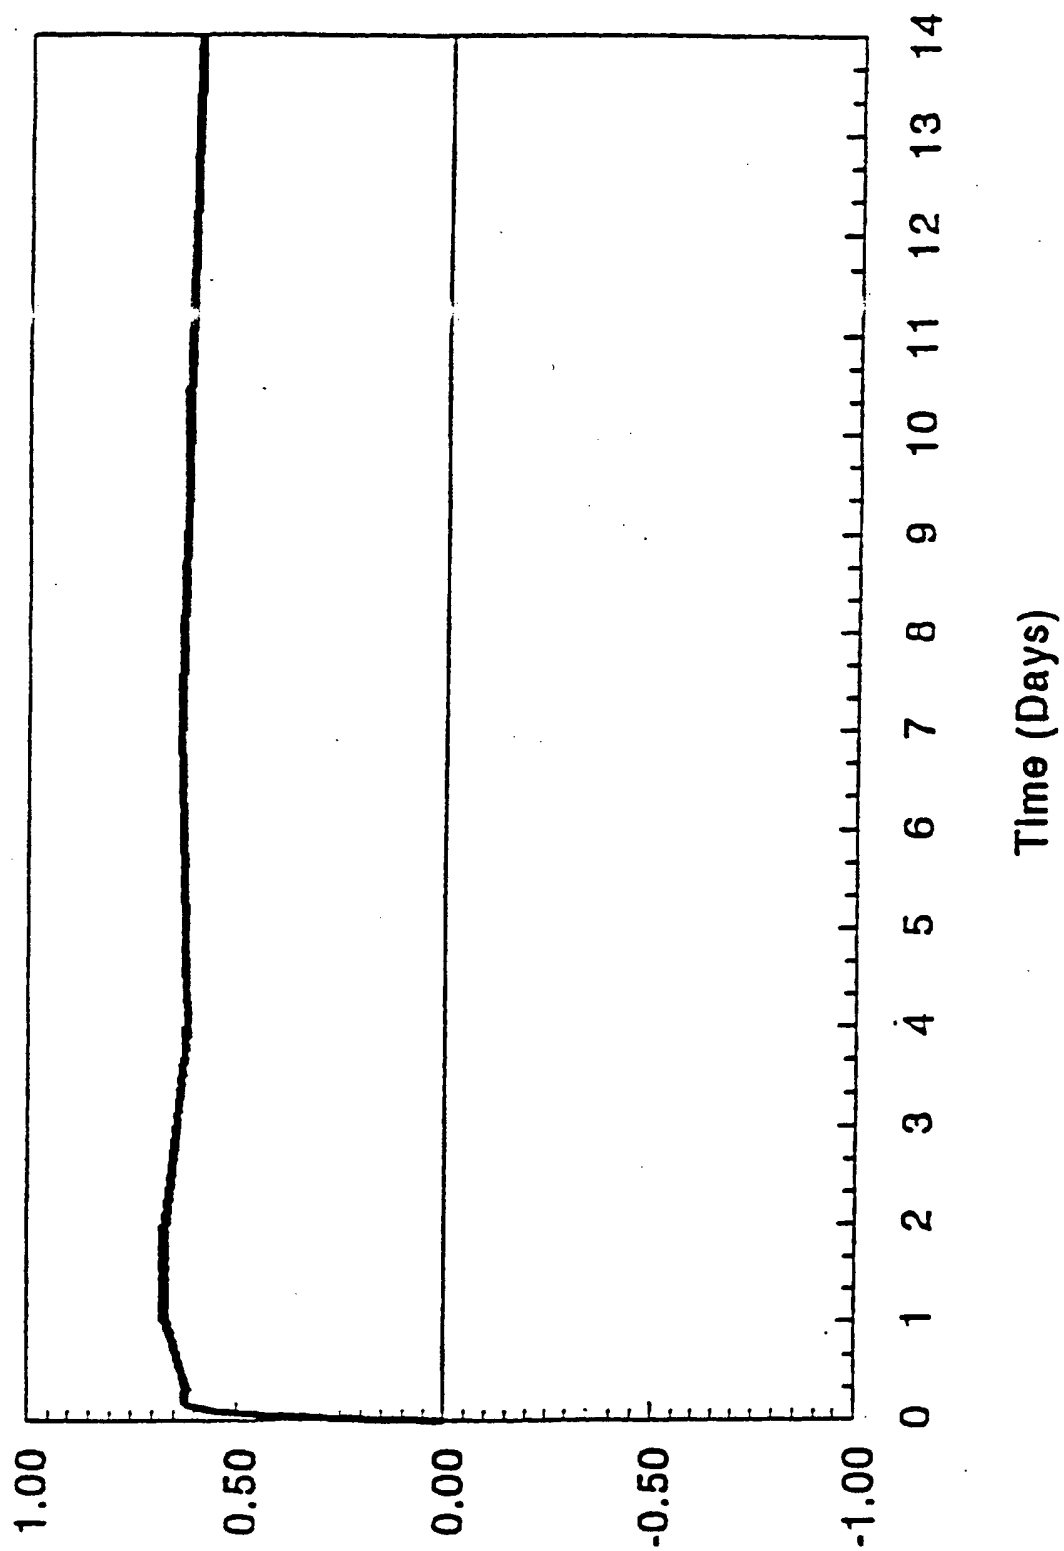


FIG. 3

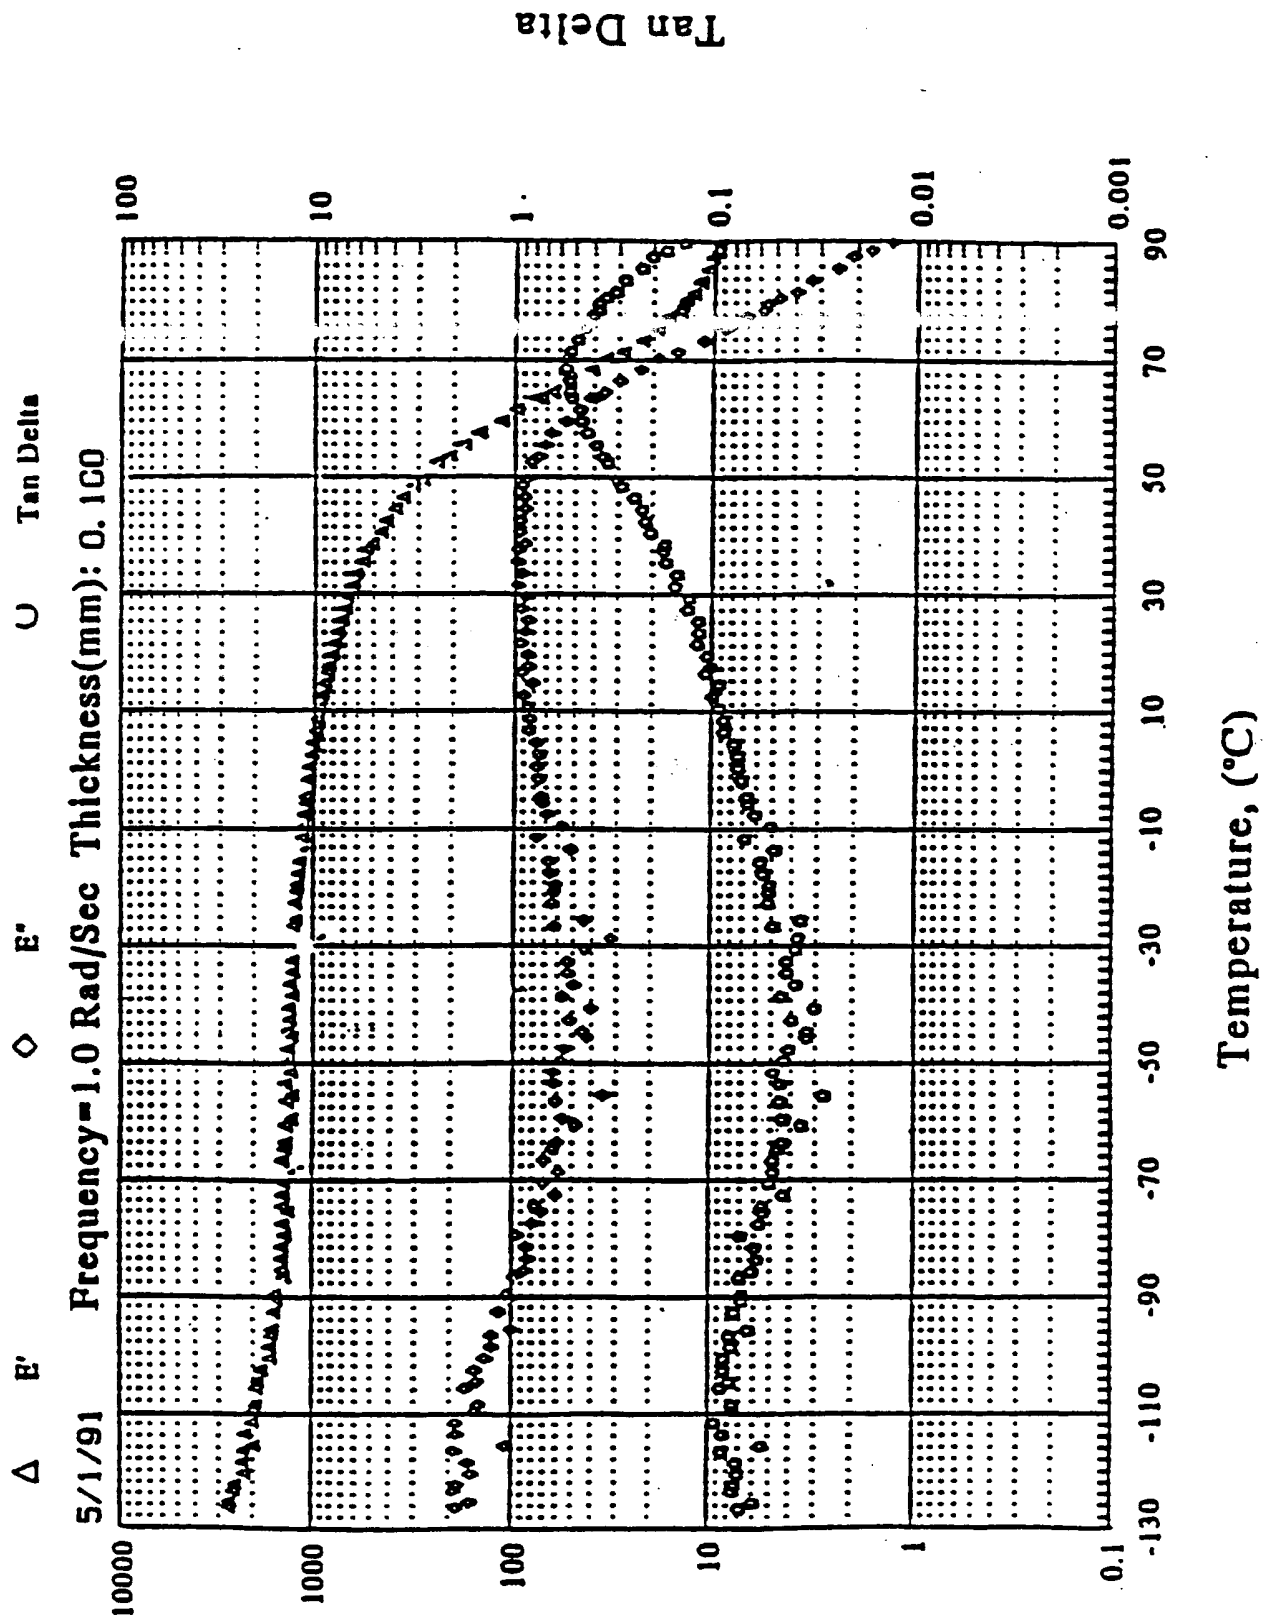

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 95/00041

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C08G18/67 C08G18/50 C09D175/16 C03C25/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08G C03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR,A,2 453 871 (MINNESOTA MINING) 7 November 1980 see claims 1,2,7,11 see page 2, line 13 - line 26 see page 12, line 38 - page 13, line 37 ---	1-3,7,9, 10
X	EP,A,0 565 425 (ALCATEL CABLE) 13 October 1993 see claims 1,3,11 see example 3 --- -/--	1-3,7, 9-11,14, 15



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- 'A' document defining the general state of the art which is not considered to be of particular relevance
- 'E' earlier document but published on or after the international filing date
- 'L' document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O' document referring to an oral disclosure, use, exhibition or other means
- 'P' document published prior to the international filing date but later than the priority date claimed

- 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- '&' document member of the same patent family

Date of the actual completion of the international search

20 March 1995

Date of mailing of the international search report

30.03.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2

Authorized officer

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 95/00041

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CHEMICAL ABSTRACTS, vol. 112, no. 24, 11 June 1990, Columbus, Ohio, US; abstract no. 218340p, 'URETHANE (METH)ACRYLATE COMPOSITIONS FOR OPTICAL FIBER COATINGS' page 61 ; see abstract & JP,A,01 308 420 (NIPPON KAYAKU) 13 December 1989 ---	1-3,6,7, 9-11,14, 15
X	EP,A,0 379 462 (CIBA-GEIGY) 25 July 1990 see claims 1, 38, 39 see page 4, line 56 - page 5, line 13 see page 6, line 9 - line 38 ---	1
A	EP,A,0 273 449 (AUSIMONT S.P.A.) 6 July 1988 see claims 1,5,7 ---	1
A	EP,A,0 322 624 (SIEMENS) 5 July 1989 see claims 1-4 see page 3, line 28 - line 32 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NL 95/00041

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2453871	07-11-80	CA-A- 1156795	08-11-83
		CH-A- 649309	15-05-85
		DE-A, C 3013827	30-10-80
		GB-A, B 2050396	07-01-81
		JP-B- 1038803	16-08-89
		JP-C- 1556271	23-04-90
		JP-A- 55139414	31-10-80
		US-A- 4508916	02-04-85
EP-A-0565425	13-10-93	JP-A- 6016755	25-01-94
JP-A-01308420	13-12-89	NONE	
EP-A-0379462	25-07-90	US-A- 4929692	29-05-90
		US-A- 4933408	12-06-90
		AT-T- 118797	15-03-95
		AU-B- 630652	05-11-92
		AU-A- 4788790	19-07-90
		CA-A- 2007352	11-07-90
		JP-A- 2258834	19-10-90
		US-A- 5002978	26-03-91
		US-A- 4994504	19-02-91
		US-A- 5075106	24-12-91
EP-A-0273449	06-07-88	CA-A- 1319220	15-06-93
		DE-A- 3777363	16-04-92
		JP-A- 63295616	02-12-88
		US-A- 4983666	08-01-91
		US-A- 5068135	26-11-91
EP-A-0322624	05-07-89	NONE	